

Light Control

Manual

KNX Push Button Keypads

LC-PBS8RB

LC-PBS8RW


Feature:

- * Switch lighting, open and close curtains, raise and lower projection screens, etc. It has long press, short press and reverse functions
- * Relative dimming & absolute dimming function output
- * Perform 8-bit scene control
- * Send values and send 1bit/1byte values
- * LED interlock grouping and LED brightness adjustment functions


Parameters:

Bus voltage	21-30 VDC, KNX Bus Power
Bus current	≤ 12mA
Bus power	≤ 360mW
Operating temperature	-5°C...+45°C
Storage temperature	-25°C...+55°C
Transport temperature	-25°C...+70°C
Relative humidity	max 90%
Casing material	Metal + PC
Dimensions	86X86X33 mm
Weight	About 0.2kg

Dimension:

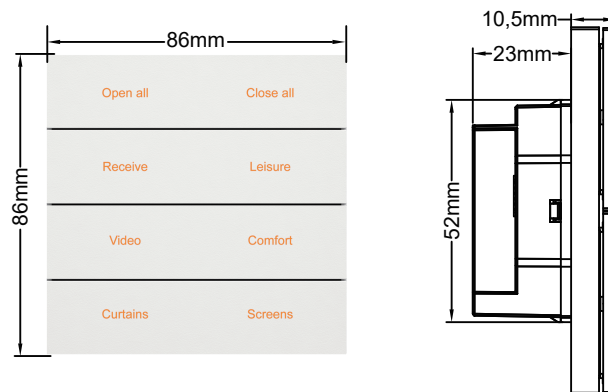

Wiring:

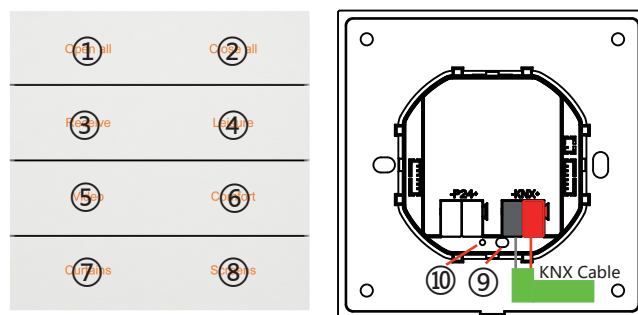

- ① Channel A;
- ② Channel B;
- ③ Channel C;
- ④ Channel D;
- ⑤ Channel E;
- ⑥ Channel F;
- ⑦ Channel G;
- ⑧ Channel H;

Each button has a feedback LED light, and each button needs to be engraved to allow light to pass through;

⑨ Programming button, used to light up the programming light;

⑩ Programming indicator light, the indicator light will light up red when entering the programming state, and the indicator light will automatically go out when programming is in progress

Contact:

Control4u

Address: Vardinon 3 Floor 7, 708,
Petah -Tiqwa , Israel, 4959507