

Light Control

DataSheet

LC-DC0808

8 Fold Universal Interface


Feature:

- * Switch lighting, open and close curtains, raise and lower projection screens, etc. It has long press, short press & reverse
- * Function output of relative dimming & absolute dimming
- * Dimming and curtains, and the function of sending fixed values
- * 8-bit scene control can be performed, the set scene function can be called
- * With LED indication function, multiple display selected states, such as: open, closed, and flashing...
- * LED interlock grouping & brightness adjustment


Parameters:

Bus voltage	21-30V DC from Bus
Bus current	≤12mA
Bus power	≤360mW
Input channel	8 Channel I/O contact
LED output current	1mA
LED channel	8 way, common anode
Shell material	PC
Dimension (H x W x D)	46 x 46 x 12.5mm
Weight(approx.)	almost 17.8g
Working temperature	-5°C...+ 45°C
Stock temperature	- 25°C...+ 55°C
Delivery temperature	- 25°C...+70°C
Relative humidity	max 90%

Dimension:

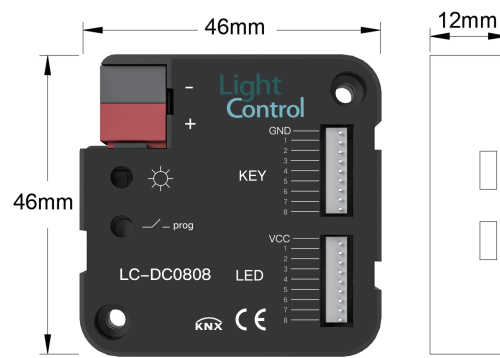

Wiring:

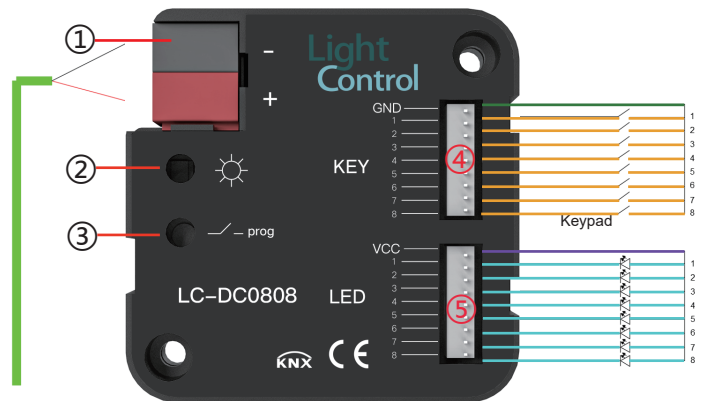

- ① Description: KNX bus terminal;
- ② Description: programming indicator light;
- ③ Description: programming button, press the button, the indicator light will be on, enter the programming state, and the indicator light will automatically turn off when programming;
- ④ Description: dry contact terminal block;
- ⑤ Description: LED terminal block;

Contact:

Control4u

Address: Vardinon 3 Floor 7, 708,
Petah -Tiqwa , Israel, 4959507