

Light Control



Mini Motion Sensor

Model No.: LC-MINIMD004


Functions

- (1) Infrared motion trigger control function
- (2) Infrared motion Master-Slave function
- (3) Enable or disable the infrared channel control output function through the object


Parameters

Bus input	21-30V DC, bus power supply
Bus current	≤12mA
Bus power	≤360mW
Sensing distance	H 2.5m~3.5m Radiation range:5-7m
Material	ABS
Dimension	H 40.1mm, D 39.8mm
Installation Hole	31mm
Installation	Embedded installation
Weight	About 0.05KGS
Operating temperature	-5°C- 45°C
Storage temperature	- 20°C- 70°C
Relative humidity	Max 90%


Dimension Drawing

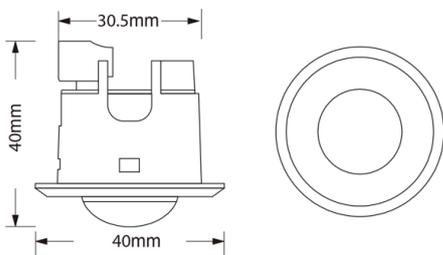


Hole Installation

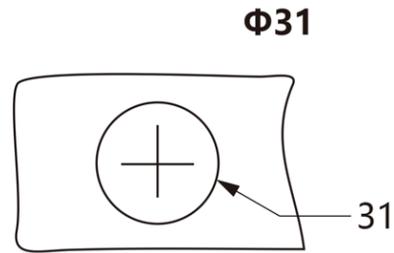

Wiring Drawing

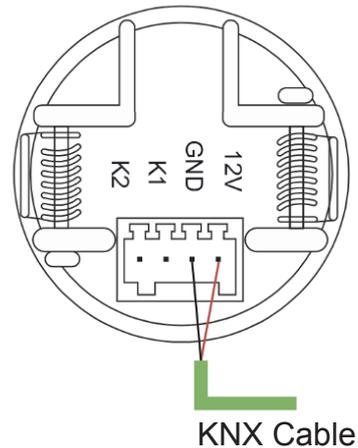

Sensing Area

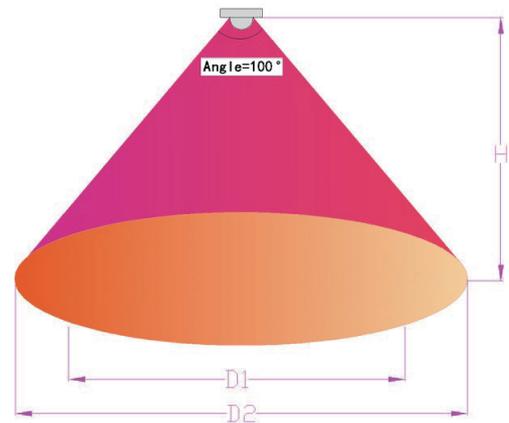

H: range: 2.5m~3m, recommended value: 2.7m
D1: range: 4m~5m, high sensitivity range
D2: range: 5m~7m, maximum sensing range

Contact

Control4u

Vardinon 3 Floor 2 , 213 , Petah -Tiqwa ,
Israel, 4959507